		TO THE UNITED STATES	MAT-8040US
		ED OFFICE (DO/EO/US)	U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR
CONCERN	ING A FILIN	то в 09 igne 674064	
NATIONAL APPLICA PCT/JP00/00		INTERNATIONAL FILING DATE 21 February 2000 (21.02.00)	PRIORITY DATE CLAIMED 25 February 1999 (25.02.99)
OF INVENTION LINEAR EDITIN	G DEVICE AN	ND NONLINEAR EDITING METHO	on.
MILAN EDITI	G DEVICE AI	D HORLINGAR EDITING METHO	, על,
CANT(S) FOR DO/EO	/US		
aka SOMIYA			
			) the following items and other information:
		tems concerning a filing under 35 U.S.C. 3'	
		UENT submission of items concerning a fi	
This is an expression under the contraction of t	ess request to beg til the expiration	in national examination procedures (35 U.S. of the applicable time limit set in 35 U.S.C.	S.C. 371(f)) at any time rather than delay 371(b) and PCT Articles 22 and 39(1)
☐ A proper Dema	and for Internation	nal Preliminary Examination was made by t	the 19th month from the earliest claimed priority date
		ication as filed (35 U.S.C. 371 (c) (2))	promy dute
a. 🛭 is trai	smitted herewith	(required only if not transmitted by the Int	ternational Bureau).
		the International Bureau.	
		pplication was filed in the United States Re	
		Application into English (35 U.S.C. 371(c)	)(2)).
		ch Report (PCT/ISA/210).	
		International Application under PCT Artic	
		h (required only if not transmitted by the In by the International Bureau.	ternational Bureau).
		wever, the time limit for making such amer	ndments has NOT expired
		I will not be made.	numents has tvor expired.
		to the claims under PCT Article 19 (35 U.S	S.C. 371(c)(3)).
		entor(s) (35 U.S.C. 371 (c)(4)). (unexec	
☐ A copy of the I	nternational Prelir	ninary Examination Report (PCT/IPEA/409	9).
A translation of (35 U.S.C. 371	the annexes to th $(c)(5)$	e International Preliminary Examination Re	eport under PCT Article 36
		(s) or information included: ment under 37 CFR 1.97 and 1.98.	
△ A FIRST prelin	ninary amendmen	ording. A separate cover sheet in compliand	ce with 37 CFR 3.28 and 3.31 is included.
_	=		
A change of po	wer of attorney an	d/or address letter.	
Other items or i	nformation:		
	tion of Form PC	T/ISA/210	
A SEC A substitution A chan Certific Other i	COND or titute spe ge of pow cate of M tems or in	OND or SUBSEQUENT titute specification. ge of power of attorney an acte of Mailing by Express tems or information:	OND or SUBSEQUENT preliminary amendment. titute specification.  ge of power of attorney and/or address letter.  cate of Mailing by Express Mail

						526 R	ec'd PCT/PT	3 25 OCT 2
Ŭ.S. APPLICATION To	NO IF KNOWN, SI Be Assig God 4	064	INTERNATIONAL PCT/	. APPLICAT JP00/009	TION NO		ATTORNEY	'S DOCKET NUMBER T-8040US
	lowing fees are sub						T T	NS PTO USE ONLY
BASIC NATIONA							CHECCENTIO	NS TIOUSE ONLY
international	search fee (37 CFI	R 1.445(a)(2)	n fee (37 CFR 1.482) paid to USPTO by the EPO or JPO.			\$970.00		
USPTO but I	internation Search	Report prepare	CFR 1.482) not paid ed by the EPO or JPC	Э		860.00		
<ul><li>International but international</li></ul>	preliminary exami onal search fee (37	nation fee (37 CFR 1.445(a)	CFR 1.482) not paid (2)) paid to USPTO .	to USPT	) 	\$690.00		
but all claims	s did not satisfy pro	ovisions of PC	d to USPTO (37 CFF T Article 33(1)-(4).	• • • • • · · · · • •		\$670.00		
☐ International and all claim			d to USPTO (37 CFF ticle 33(1)-(4)			\$96.00		1
Sumahawaa af \$120.0			ATE BASIC F				\$860.00	
Surcharge of \$130.0 nonths from the earl	iest claimed priorit	ty date (37 Cl	FR 1.492 (e)).	□ 2	0 L	J 30	\$0.00	
CLAIMS	NUMBER		NUMBER EX	TRA		ATE		
Total claims  Independent claims	105	- 20 = - 3 =	85			78.00	\$1,530.00	<del> </del>
Multiple Dependent			L			/8.00 ⊠	\$0.00 \$270.00	
	TO	OTAL OF	ABOVE CAL		IONS		\$2,660.00	
Reduction of 1/2 for nust also be filed (N	filing by small ent Note 37 CFR 1.9, 1	tity, if applica .27, 1.28) (ch	ble. Verified Small I eck if applicable).	Entity Stat	ement		\$0.00	
7				SUB	<b>FOT</b>	<b>L</b> =	\$2,660.00	
ionths from the earl	30.00 for furnishing iest claimed priorit	g the English ty date (37 CF		□ 20		□ 30 +	\$0.00	
			TOTAL NAT			<u> </u>	\$2,660.00	
e for recording the companied by an a	enclosed assignme ppropriate cover sh	int (37 CFR 1 neet (37 CFR )	.21(h)). The assignm 3.28, 3.31) (check if	nent must b applicabl	e).		\$0.00	i i
			TOTAL FEES	ENCL	OSEI	) =	\$2,660.00	
3							Amount to be: refunded	\$
							charged	\$
Please charg  A duplicate	e my Deposit Acco	ount No. is enclosed.		amount of			to cover the abo	ve fees.
The Commis to Deposit A			arge any fees which: A duplicate copy of the				ny overpayment	
OTE: Where an a	ppropriate time li	mit under 37	CFR 1.494 or 1.495 e the application to	S has not h	een me	/ 1	on to revive (37 CF	R)
END ALL CORRES			application to	houning ji	- ALLIA			
awrence E. Asher						ATIBE	ece ( . (	Men
Ratner & Prestia P.O. Box 980				ŚIGNATURE				
alley Forge, PA 19				Lawrence E. Ashery				
'el: (610) 407-0700					NAM			
					34,51: REGIS		N NUMBER	<del>//</del>
						tober 20		-
			-		DATE			
				Ī				

**526 Rec'd PCT/PTO 25 OCT** 2000

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant:

K. Somiya

: Art Unit:

Serial No.:

To Be Assigned

: Examiner:

Filed:

<sup>\*</sup> Herewith

•

FOR:

NONLINEAR EDITING

DEVICE AND NONLINEAR

**EDITING METHOD** 

## PRELIMINARY AMENDMENT

Assistant Commissioner for Patents Washington, D.C. 20231 S I R:

Prior to examination, please amend the above application as follows:

## IN THE SPECIFICATION:

After the title and before the first paragraph, please insert --THIS APPLICATION IS A U.S. NATIONAL PHASE APPLICATION OF PCT INTERNATIONAL APPLICATION PCT/JP00/00963--.

On page 4, line 21, please delete "Hight" and insert -- "High"--.

# IN THE DRAWINGS:

Please delete page "7/7" of the drawings, also labeled as "Reference Numerals" in its entirety. Further, please delete page "4/7" of the drawing, and replace with the drawing attached hereto.

#### IN THE CLAIMS:

Please amend claims 13, 18, 20, 24, and 45 as follows and add new claims 46-50:

- 13. (As Amended) The nonlinear editing device according to claim[s] 7 [or 8] further comprising
- a first format converter for converting the output data of said first
- 4 multi-format decoder with at least one of SD/HD conversion, HD/SD conversion,
- 5 NTSC/PAL conversion, and PAL/NTSC conversion.
  - 18. (As Amended) The nonlinear editing device according to

1

- 2 claim[s] 7 [or 8] further comprising
- a second format converter for converting the output data of said
- second multi-format decoder with at least one of SD/HD conversion, HD/SD
- 5 conversion, NTSC/PAL conversion, and PAL/NTSC conversion.
- 20. (As Amended) The nonlinear editing device according to claim[s] 10 [or 11] further comprising
- a second format converter for converting output data of said second
- 4 multi-format decoder with at least one of SD/HD conversion, HD/SD conversion,
- 5 NTSC/PAL conversion, and PAL/NTSC conversion.
- 24. (As Amended) The nonlinear editing device according to claim[s] 7 [or 8] further comprising
- a third format converter for converting output data of said digital video effector with at least one of SD/HD conversion, HD/SD conversion,
- 5 NTSC/PAL conversion, and PAL/NTSC conversion.
- 45. (As Amended) The nonlinear editing method according to claim[s] 40 [or 42] further comprising
- a third format converting step for converting output data obtained in said video effect step with at least one of the SD/HD conversion, the HD/SD conversion, the NTSC/PAL conversion, and the PAL/NTSC conversion.
- 1 46. (Newly Added) The nonlinear editing device according to claim 2 8 further comprising
- a first format converter for converting the output data of said first
- 4 multi-format decoder with at least one of SD/HD conversion, HD/SD conversion,
- 5 NTSC/PAL conversion, and PAL/NTSC conversion.
- 1 47. (Newly Added) The nonlinear editing device according to claim 2 8 further comprising
- a second format converter for converting the output data of said
- 4 second multi-format decoder with at least one of SD/HD conversion, HD/SD
- 5 conversion, NTSC/PAL conversion, and PAL/NTSC conversion.
  - 48. (Newly Added) The nonlinear editing device according to

- 2 claim 11 further comprising
- a second format converter for converting output data of said second
- 4 multi-format decoder with at least one of SD/HD conversion, HD/SD conversion,
- 5 NTSC/PAL conversion, and PAL/NTSC conversion.
- 49. (Newly Added) The nonlinear editing device according to
- 2 claim 8 further comprising
- a third format converter for converting output data of said digital
- 4 video effector with at least one of SD/HD conversion, HD/SD conversion,
- 5 NTSC/PAL conversion, and PAL/NTSC conversion.
  - 50. (Newly Added) The nonlinear editing method according to
- 2 claim 42 further comprising
- a third format converting step for converting output data obtained in
- said video effect step with at least one of the SD/HD conversion, the HD/SD
- 5 conversion, the NTSC/PAL conversion, and the PAL/NTSC conversion.

Respectfully submitted

Lawrence E. Ashery, Reg. No. 34,515

Attorney for Applicants

LEA/lm

Dated: October 25, 2000

Suite 301, One Westlakes, Berwyn

P.O. Box 980

Valley Forge, PA 19482-0980

(610) 407-0700

The Assistant Commissioner for Patents is hereby authorized to charge payment to Deposit Account No. 18-0350 of any fees associated with this communication.

EXPRESS MAIL Mailing Label Number: EL629503822US

Date of Deposit: October 25, 2000

I hereby certify that this paper and fee are being deposited, under 37 C.F.R. § 1.10 and with sufficient postage, using the "Express Mail Post Office to Addressee" service of the United States Postal Service on the date indicated above and that the deposit is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Kathleen Libby

7/PR+5

Literal translation

5

10

15

20

25

#### DESCRIPTION

# Nonlinear Editing Device and Nonlinear Editing Method

## FIELD OF THE INVENTION

The present invention relates to a device for editing video data encoded in different compression formats and its method.

## BACKGROUND OF THE INVENTION

Conventionally, video for telecasting programs or the like has been produced by editing video source data recorded on a magnetic tape using a VCR (Video Cassette Recorder). Recently, the video source data has been recorded as digital data. The video source data recorded as the digital data is encoded in compression formats employed by respective recording devices. As the compression formats, there are several kinds of formats such as MPEG (Moving Picture Experts Group) format, a motion-JPEG (Joint Photographic Experts Group) format, a format (it is hereinafter called DV, especially is called DVHD for HD) decided by HD (High-Definition) Digital VCR Conference, and a format (one having 25 Mbps of encoded video rate is hereinafter called DVCPRO, and one having 50 Mbps of encoded video rate is called DVCPRO50) defined in SMPTE 314M of SMPTE (Society of Motion Picture and Television Engineers) standards. A compression format employed by each recording device depends on the device, and an employed magnetic tape varies.

For resolving troublesomeness that the video source data recorded on various magnetic tapes is managed, the compression format of the video source data is often converted and unified in an editing work process, and the video source data converted in compression format is recorded and stored on a magnetic tape in the same format. In other words, the video source data

10

15

20

recorded in various compression formats is converted into a prescribed compression format, is recorded on a magnetic tape attachable to a VCR for reproducing editing sources, and is archived.

Fig. 6 is a block diagram of a conventional editing system.

This editing system produces broadcasting video data in the MPEG format using video source data recorded in the DV format and video source data recorded in the MPEG format.

In Fig. 6, video source data is recorded on magnetic tape 601 in the DV format. Another video source data is recorded on magnetic tape 606 in the MPEG format. For convenience sake, the video source data recorded on magnetic tape 601 is called video source data 661, and the video source data recorded on magnetic tape 606 is called video source data 666.

First, DV decoder 602 reproduces video source data 661 recorded on magnetic tape 601 and decompresses video source data 661 to base band data. MPEG encoder 603 compresses the decompressed base band data in the MPEG format and records it on magnetic tape 604.

MPEG decoder 605 reproduces the video data recorded on magnetic tape 604 and decompresses it to base band data.

MPEG decoder 607 reproduces video source data 666 recorded on magnetic tape 606 and decompresses video source data 666 to base band data.

Digital video effector (DVE) 608 synthesizes respective base band data supplied from MPEG decoder 605 and MPEG decoder 607 with a given timing, and outputs the base band data given a dissolve effect or a wipe effect.

MPEG decoder 609 compresses the base band data supplied from DVE 608 25 in the MPEG format, and records it on magnetic tape 610.

Finally the video source data is stored on magnetic tapes 604, 606, and the edited video data is stored on magnetic tape 610. Magnetic tapes 604, 606, 610

10

15

20

have the same format, and the video data is recorded in the same compression format.

Thus, the conventional editing system unifies the formats of the video source data recorded in various compression formats during in an editing work process, and therefore, a process where the video source data is recompressed after being temporarily decompressed is required. This process has a problem that original image quality of the video data is noticeably degraded. In addition, there is a problem that a large space for storing the magnetic tape is also required.

On the other hand, personal-computer-based nonlinear editing devices have recently become widespread. A general nonlinear editing device digitizes a video signal of a base band, encodes it in a prescribed compression format, stores video data in a hard disk, and realizes space-saving. However, a process where the video data recorded on the magnetic tape is reproduced by a VCR, is decompressed to the base band, and then is digitized is still required, and the image degradation caused by the decompression or the reproduction of the video data is a problem.

Some type of nonlinear editing device can directly take in the compressed video data. In this case, also, the nonlinear editing device cannot handle process a plurality of compression formats because it is limited to a prescribed compression format.

Thus, in the general nonlinear editing device the compression format is fixed, and no general nonlinear editing device can edit mixed-video-source-data in a plurality of compression formats.

DISCLOSURE OF THE INVENTION

The present invention provides a nonlinear editing device and a nonlinear

10

15

20

25

editing method which can eliminate a troublesome process for unifying formats and allow a high-quality editing work where degradation of video data following recompression is prevented, even when mixed video source data in many kinds of compression formats exists.

For addressing the problems discussed above, the nonlinear editing device in accordance with the present invention comprises the following elements:

a storage that can record video data compressed and encoded in a plurality of kinds of compression formats keeping the compression formats; and

a first multi-format decoder that can decompress the video data recorded in the storage in at least two or more compression formats of the plurality of kinds of compression formats.

The nonlinear editing device in accordance with the present invention further includes a second multi-format decoder that can decompress the video data recorded in the storage in at least one or more compression formats of the plurality of kinds of compression formats.

The nonlinear editing device in accordance with the present invention further includes a digital video effector for synthesizing output data of the first multi-format decoder and output data of the second multi-format decoder.

The nonlinear editing device in accordance with the present invention further includes a format converter for performing at least one of SD (Standard Definition) / HD (Hight Definition) conversion, HD/SD conversion, NTSC (National Television System Committee) / PAL (Phase Alternation Line) conversion, and PAL/NTSC conversion.

For addressing the problems discussed above, the nonlinear editing method in accordance with the present invention comprises a first decoding step for sequentially decompressing video data which is recorded in the storage that can record the video data compressed and encoded in the plurality of kinds of compression formats keeping the compression formats and is in at least two or more compression formats of the plurality of kinds of compression formats.

The nonlinear editing method in accordance with the present invention further includes a second decoding step for sequentially decompressing the video data recorded in the storage in at least one or more compression formats of the plurality of kinds of compression formats.

The nonlinear editing method in accordance with the present invention further includes a video effect step for synthesizing the output data obtained from the first decoding step and the output data obtained from the second decoding step.

The nonlinear editing method in accordance with the present invention further includes a format converting step for performing at least one of the SD/HD conversion, the HD/SD conversion, the NTSC/PAL conversion, and the PAL/NTSC conversion.

15

20

25

10

5

### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of a nonlinear editing device in accordance with exemplary embodiment 1 of the present invention.

Fig. 2 is an operation timing chart of the nonlinear editing device in accordance with exemplary embodiment 1 of the present invention.

Fig. 3 is an operation timing chart of a nonlinear editing device in accordance with exemplary embodiment 2 of the present invention.

Fig. 4 is an operation timing chart of a nonlinear editing device in accordance with exemplary embodiment 3 of the present invention.

Fig. 5 is an operation timing chart of a nonlinear editing device in accordance with exemplary embodiment 4 of the present invention.

Fig. 6 is a block diagram of a conventional nonlinear editing device.

10

15

20

25

# PREFERRED EMBODIMENTS OF THE INVENTION

Nonlinear editing devices in accordance with four preferred embodiments of the present invention are described hereinafter with reference to the drawings.

(Preferred embodiment 1)

Fig. 1 is a block diagram of a nonlinear editing device in accordance with embodiment 1 of the present invention. In Fig. 1, hard disk unit 101 stores a plurality of encoded video data that is encoded in a plurality of compression formats, and the encoded video data is arbitrarily read out. Hard disk unit 101 can receive encoded video data that is compressed and encoded from outside and store it. In embodiment 1, hard disk unit 101 stores a plurality of encoded video data in each compression format of DVCPRO, DVCPRO50, DV, DVHD, MPEG.

Editing control section 109 has a graphical user interface (GUI) (not shown in Fig. 1). An operator, using the GUI, combines the plurality of encoded video data stored in hard disk unit 101 and produces a desired video sequence. The video sequence is stored in an edit decision list of a reproduction starting point and a reproduction finishing point of each encoded video data, a reading-out order, video effect zone and type, and the like. Editing control section 109 controls the entire nonlinear editing device based on the edit decision list for reproducing the desired video sequence.

The encoded video data read from hard disk unit 101 is supplied to first multi-format decoder 102 or second multi-format decoder 104 in response to a command of editing control section 109.

First multi-format decoder 102 can decode the encoded video data in the compression formats of at least the DVCPRO and the DVCPRO50. Second multi-format decoder 104 can decode the encoded video data in the compression

10

15

20

25

formats of at least the DVHD.

Base band data decoded by first multi-format decoder 102 is sequentially fed into first format converter 103. Base band data decoded by second multi-format decoder 104 is sequentially fed into second format converter 105.

First and second format converters 103, 105, in response to a command of editing control section 109, perform video format conversion such as NTSC/PAL conversion, PAL/NTSC conversion, SD/HD conversion, or HD/SD conversion, and output the converted base band data. In addition, first and second format converters 103, 105 output the fed base band data without any conversion in response to a command of editing control section 109.

Digital video effector (DVE) 106, in response to a command of editing control section 109, synthesizes base band data supplied from first and second format converters 103, 105, applies a video effect such as a dissolve effect or a wipe effect to the data, and outputs it. In addition, DVE 106 can output the base band data supplied from one of first and second format converters 103, 105 without any conversion in response to a command of editing control section 109.

Third format converter 107, in response to a command of editing control section 109, performs a video format conversion such as the NTSC/PAL conversion, the PAL/NTSC conversion, the SD/HD conversion, or the HD/SD conversion, and outputs the base band data. In addition, third format converter 107 can output the fed base band data without any conversion in response to a command of editing control section 109.

Video output section 108 supplies the base band data outputted from third format converter 107 to a monitor (not shown in Fig. 1). Analog output and digital output are switched depending on a connected monitor.

An operation flow of the nonlinear editing device having such structure in accordance with embodiment 1 is hereinafter described.

10

15

20

25

Fig. 2 is an operation timing chart of the nonlinear editing device in accordance with exemplary embodiment 1 of the present invention. In Fig. 2, sequence 2100 is a control sequence based on an edit decision list stored in editing control section 109. Sequence 2200 shows a transition of a decoding operation mode of first multi-format decoder 102. Sequence 2400 shows a transition of a decoding operation mode of second multi-format decoder 104. Sequence 2500 shows a transition of a converting operation mode of second format converter 105. Sequence 2600 shows a video output sequence of DVE 106. Sequence 2700 shows a transition of a converting operation mode of third format converter 107. Sequence 2800 shows a transition of a video output operation of video output section 108.

First, first video data compressed and encoded in the DVCPRO format of a NTSC mode is read out from hard disk unit 101, and is supplied to first multiformat decoder 102. First multi-format decoder 102 decodes the first video data in a DVCPRO format decompression mode. The base band data decoded by first multi-format decoder 102 is supplied to DVE 106 through first format converter 103.

Next, second video data compressed and encoded in the DV format of a HD mode is read out from hard disk unit 101, and is supplied to second multi-format decoder 104. Second multi-format decoder 104 decodes the second video data in a DVHD format decompression mode. HD base band data decoded by second multi-format decoder 104 is supplied to second format converter 105. Second format converter 105 converts down the HD base band data decoded by second multi-format decoder 104 to SD base band data and supplies it to DVE 106.

Next, third video data compressed and encoded in the DVCPRO50 format of the NTSC mode is read out from hard disk unit 101, and is supplied to first multi-format decoder 102. First multi-format decoder 102 is switched from the

10

15

20

25

DVCPRO format decompression mode to a DVCPRO50 format decompression mode in time for the timing, and decodes the third video data. The base band data decoded by first multi-format decoder 102 is supplied to DVE 106 through first format converter 103.

DVE 106 applies the dissolve effect at a cut back point from a first video to a second video and the wipe effect at a cut back point from the second video to a third video, and outputs the video. Third format converter 107 converts the video output in the NTSC format of DVE 106 to the PAL format.

Video output section 108 outputs the video data converted by third format converter 107 to the monitor.

Thus, in embodiment 1, even if compression formats are not unified, encoded video data keeping various compression formats can be stored in a hard disk unit 101 and is decoded adapted to respective compression formats. As a result, edited results are not required to be recorded on a magnetic tape to prevent recompression from causing degradation of image quality.

In embodiment 1 hard disk unit 101 is used as the storage, but, the storage is not limited to this. For example, other mass storage can be similarly used. Compression formats are not limited to those in embodiment 1 either. In addition, in embodiment 1 two multi-format decoders are provided, but it is not limiting. The format converter may be one capable of switching a plurality of format conversions with each other, and can be eliminated from the device structure.

# (Preferred embodiment 2)

Embodiment 2 is described hereinafter. A structure of a nonlinear editing device in accordance with embodiment 2 is same as that in embodiment 1 where second multi-format decoder 104 is replaced with a software decoder.

10

15

20

25

This software decoder is called third multi-format decoder 304. Third multi-format decoder 304 can decode encoded video data in at least MPEG format in a software process at a processing period 1.5 times longer than a real time process period.

Fig. 3 is an operation timing chart of the nonlinear editing device in accordance with embodiment 2. In Fig. 3, sequence 3100 is a control sequence based on an edit decision list stored in editing control section 109. Sequence 3200 shows a transition of a decoding operation mode of first multi-format decoder 102. Sequence 3400 shows a transition of a decoding operation mode of third multi-format decoder 304. Sequence 3800 shows a transition of a video output operation of video output section 108.

First, fourth video data compressed and encoded in the DVCPRO format is read out from hard disk unit 101, and is supplied to first multi-format decoder 102. First multi-format decoder 102 decodes the fourth video data in a DVCPRO format decompression mode. The data decoded by first multi-format decoder 102 is supplied to DVE 106 through first format converter 103.

Next, fifth video data compressed and encoded in the MPEG format is read out from hard disk unit 101, and is supplied to third multi-format decoder 304. Considering decoding process period of third multi-format decoder 304, the fifth video data is read out from hard disk unit 101 simultaneously with reading out of the fourth video data since the latter portion of the reading out of the fourth video data, and is supplied to third multi-format decoder 304. Third multi-format decoder 304 decodes the fifith video data in a MPEG format decompression mode. The decoded base band data is buffered as appropriate, and is supplied to DVE 106 through second format converter 105 with a suitable timing.

Next, sixth video data compressed and encoded in the DVCPRO50 format

10

15

20

25

is read out from hard disk unit 101, and is supplied to first multi-format decoder 102. First multi-format decoder 102 is switched from the DVCPRO format decompression mode to the DVCPRO50 format decompression mode in time for this timing, and decodes the sixth video data. The base band data decoded by first multi-format decoder 102 is supplied to DVE 106 through first format converter 103.

DVE 106, based on control sequence 3100, performs timely cut back from the fourth video to the fifth video, and from the fifth video to the sixth video, and outputs video data. The video data outputted from DVE 106 is supplied to video output section 108 through third format converter 107, and is supplied to a monitor.

Thus, in embodiment 2, the video data is previously read responsive to software decoding process period of third multi-format decoder 304, and a seamless video sequence is realized.

(Preferred embodiment 3)

Embodiment 3 is described hereinafter. A structure of a nonlinear editing device in accordance with embodiment 3 is same as that in embodiment 1 where second multi-format decoder 104 is replaced with a software decoder. This software decoder is called fourth multi-format decoder 404. Fourth multi-format decoder 404 can decode encoded video data with size smaller than a prescribed value in the DVCPRO format and the DV format in real time in a software process. Furthermore, first multi-format decoder 102 is constituted so as to decode encoded video data in the MPEG format and the DV format as well as encoded video data in the DVCPRO format and the DVCPRO50 format.

Fig. 4 is an operation timing chart of the nonlinear editing device in accordance with embodiment 3. In Fig. 4, sequence 4100 is a control sequence

10

15

20

25

based on an edit decision list stored in editing control section 109. Sequence 4200 shows a transition of a decoding operation mode of first multi-format decoder 102. Sequence 4400 shows a transition of a decoding operation mode of fourth multi-format decoder 404. Sequence 4800 shows a transition of a video output operation of video output section 108.

First, seventh video data compressed and encoded in the DVCPRO format is read out from hard disk unit 101, and is supplied to first multi-format decoder 102. First multi-format decoder 102 decodes the seventh video data in the DVCPRO format decompression mode. The base band data decoded by first multi-format decoder 102 is supplied to DVE 106 through first format converter 103. Here, the latter portion of the seventh video data is decoded by fourth multi-format decoder 404. The base band data decoded by fourth multi-format decoder 404 is supplied to DVE 106 through first format converter 103. During the latter portion of the seventh video data is decoded by fourth multi-format decoder 404, first multi-format decoder 102 is switched from the DVCPRO format decompression mode to the MPEG format decompression mode.

Next, eighth video data compressed and encoded in the MPEG format is read out from hard disk unit 101, and is supplied to first multi-format decoder 102. Before this timing, first multi-format decoder 102 completes changeover of the decoding operation mode, and decodes the eighth video data in the MPEG format. The decoded base band data is supplied to DVE 106 through second format converter 105.

Next, the first portion of ninth video data compressed and encoded in the DV format is read out from hard disk unit 101, and is supplied to fourth multiformat decoder 404. Fourth multi-format decoder 404 is switched from the DVCPRO format decompression mode to the DV format decompression mode in time for this timing, and decodes the first portion of the ninth video data. The

10

15

20

25

base band data decoded by fourth multi-format decoder 404 is supplied to DVE 106 through second format converter 105.

During the first portion of the ninth video data is decoded by fourth multiformat decoder 404, first multi-format decoder 102 is switched from the MPEG format decompression mode to the DV format decompression mode.

The latter portion of the ninth video data is supplied to first multi-format decoder 102. Before this timing, first multi-format decoder 102 completes changeover of the decoding operation mode, and decodes the latter portion of the ninth video data in the DV format. The decoded base band data is supplied to DVE 106 through first format converter 103.

DVE 106, based on control sequence 4100, performs timely cut-back from the first portion to the latter portion of the seventh video, from the latter portion of the seventh video to the eighth video, from the eighth video to the first portion of the ninth video, and from the first portion to the latter portion of the ninth video, and outputs video data. The video data outputted from DVE 106 is supplied to video output section 108 through third format converter 107, and is supplied to a monitor.

Thus, in embodiment 3, a changeover period of decoding operation mode of first multi-format decoder 102 is obtained by concurrently performing a software decoding process of fourth multi-format decoder 404, and a seamless video sequence is realized.

## (Preferred embodiment 4)

Embodiment 4 is described hereinafter. A structure of a nonlinear editing device in accordance with embodiment 4 is same as that in embodiment 1 where first multi-format decoder 102 is replaced with a decoder that can switch a decoding operation mode substantially seamlessly by means of a pipeline

10

15

20

25

treatment technology or the like. This decoder is called sixth multi-format decoder 162. Second multi-format decoder 104 is replaced with a software decoder, and this software decoder is called seventh multi-format decoder 174. Seventh multi-format decoder 174 can decode encoded video data in at least the DV format in real time in a software process.

Fig. 5 is an operation timing chart of the nonlinear editing device in accordance with embodiment 4. In Fig. 5, sequence 5100 is a control sequence based on an edit decision list stored in editing control section 109. Sequence 5200 shows a transition of a decoding operation mode of sixth multi-format decoder 162. Sequence 5400 shows a transition of a decoding operation mode of seventh multi-format decoder 174. Sequence 5800 shows a transition of a video output operation of video output section 108.

First, tenth video data compressed and encoded in the MPEG format is read out from hard disk unit 101, and is supplied to sixth multi-format decoder 162. Sixth multi-format decoder 162 decodes the tenth video data in the DVCPRO format decompression mode. The base band data decoded by sixth multi-format decoder 162 is supplied to DVE 106 through first format converter 103.

The first portion of eleventh video data which is commanded with the dissolve effect is decoded by seventh multi-format decoder 174. The base band data decoded by seventh multi-format decoder 174 is supplied to DVE 106 through second format converter 105.

The intermediate part of the eleventh video data which is compressed and encoded in the DV format is supplied, following the tenth video data, from hard disk unit 101 to sixth multi-format decoder 162. Sixth multi-format decoder 162 seamlessly completes changeover of the decoding operation mode, and decodes the intermediate part of the eleventh video data in the DV format. The

10

15

20

25

decoded base band data is supplied to DVE 106 through first format converter 103.

The latter portion (commanded with the wipe effect) of eleventh video data compressed and encoded in the DV format is supplied to seventh multi-format decoder 174. Seventh multi-format decoder 174 decodes the latter portion of the eleventh video data. The base band data decoded by seventh multi-format decoder 174 is supplied to DVE 106 through second format converter 105.

The twelfth video data compressed and encoded in the DVCPRO50 format is supplied, following the intermediate part of the eleventh video data, from hard disk unit 101 to sixth multi-format decoder 162. Sixth multi-format decoder 162 seamlessly completes the changeover of the decoding operation mode, and decodes the twelfth video data in the DVCPRO format. The decoded base band data is supplied to DVE 106 through first format converter 103.

DVE 106 applies the video effect based on control sequence 5100 and outputs the video data. The video data outputted from DVE 106 is supplied to video output section 108 through third format converter 107, and is supplied to a monitor.

Thus, in embodiment 4, a seamless video sequence is realized by using, as a main decoder, sixth multi-format decoder 162 having a seamless changeover function of the decoding operation mode, and supplementally operating seventh multi-format decoder 174 only during a video effect period.

In embodiments 1, 2, 3, 4 video data processes are described. Audio data accompanying the video data or independently inputted and stored audio data is processed similarly. The nonlinear editing device is not limited only to video editing. The nonlinear editing device can perform editing such as split, fade-in, fade-out, and cross-fade with the video data for the audio data. Furthermore, according to purposes, title data and image data that are produced in various

formats can be imported and overlapped on video. The video effect realized by DVE 106 is not limited to the wipe effect or the dissolve effect, and various video effects such as a picture-in-picture effect are available. Color collection can be applied to the base band data fed into DVE 106.

5

10

# INDUSTRIAL APPLICABILITY

The present invention realizes a nonlinear editing device which can eliminate a troublesome process for unifying formats and allow a high-quality editing work where degradation of video data following recompression is prevented, even when mixed video source data in many kinds of compression formats exists.

10

15

20

25

#### **CLAIMS**

1. A nonlinear editing device for editing video data, audio data, or video data and audio data, said nonlinear editing device comprising:

a storage for recording video data compressed and encoded in a plurality of kinds of compression formats keeping the compression formats; and

a first multi-format decoder for decompressing the video data recorded in the storage in at least two or more compression formats of the plurality of kinds of compression formats.

2. The nonlinear editing device according to claim 1 further comprising

a second multi-format decoder for decompressing the video data recorded in said storage in at least one or more compression formats of the plurality of kinds of compression formats.

- 3. The nonlinear editing device according to claim 2, wherein at least one of said first multi-format decoder and said second multi-format decoder is a software decoder realized by a software.
- 4. The nonlinear editing device according to claims 2 or 3, wherein said first multi-format decoder and said second multi-format decoder are sequentially switched with each other responsive to a transition point of compression formats when compression formats of video data read out from said storage are various.
- 5. The nonlinear editing device according to claims 2 or 3, wherein said second multi-format decoder decompresses video data in a part at least one of just before a transition point of compression formats and just after of the transition point, and said first multi-format decoder decompresses video data in the other part, when compression formats of the video data read out from said storage are various.

10

15

20

25

6. The nonlinear editing device according to claims 2 or 3 further comprising

a digital video effector for synthesizing output data of said first multiformat decoder and output data of said second multi-format decoder.

7. The nonlinear editing device according to claim 4 further comprising

a digital video effector for synthesizing output data of said first multiformat decoder and output data of said second multi-format decoder.

8. The nonlinear editing device according to claim 5 further comprising

a digital video effector for synthesizing output data of said first multiformat decoder and output data of said second multi-format decoder.

9. The nonlinear editing device according to claims 1, 2, or 3 further comprising

a first format converter for converting output data of said first multiformat decoder with at least one of SD (Standard Definition) / HD (High Definition) conversion, HD/SD conversion, NTSC (National Television System Committee) / PAL (Phase Alternation Line) conversion, and PAL/NTSC conversion.

10. The nonlinear editing device according to claim 4 further comprising

a first format converter for converting output data of said first multiformat decoder with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.

11. The nonlinear editing device according to claim 5 further comprising

a first format converter for converting output data of said first multi-

10

15

format decoder with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.

- 12. The nonlinear editing device according to claim 6 further comprising
- a first format converter for converting the output data of said first multi-format decoder with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.
- 13. The nonlinear editing device according to claims 7 or 8 further comprising
- a first format converter for converting the output data of said first multi-format decoder with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.
- 14. The nonlinear editing device according to claims 2 or 3 further comprising
- a second format converter for converting output data of said second multi-format decoder with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.
- 15. The nonlinear editing device according to claim 4 further comprising
- a second format converter for converting output data of said second multi-format decoder with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.
  - 16. The nonlinear editing device according to claim 5 further comprising
- a second format converter for converting output data of said second multi-format decoder with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.

10

15

20

25

17. The nonlinear editing device according to claim 6 further comprising

a second format converter for converting the output data of said second multi-format decoder with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.

18. The nonlinear editing device according to claims 7 or 8 further comprising

a second format converter for converting the output data of said second multi-format decoder with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.

19. The nonlinear editing device according to claim 9 further comprising

a second format converter for converting output data of said second multi-format decoder with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.

20. The nonlinear editing device according to claims 10 or 11 further comprising

a second format converter for converting output data of said second multi-format decoder with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.

21. The nonlinear editing device according to claim 12 further comprising

a second format converter for converting the output data of said second multi-format decoder with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.

22. The nonlinear editing device according to claim 13 further comprising

a second format converter for converting the output data of said second multi-format decoder with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.

23. The nonlinear editing device according to claim 6 further 5 comprising

a third format converter for converting output data of said digital video effector with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.

24. The nonlinear editing device according to claims 7 or 8 further comprising

a third format converter for converting output data of said digital video effector with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.

25. The nonlinear editing device according to claim 12 further comprising

a third format converter for converting output data of said digital video effector with at least one of the SD/HD conversion, the HD/SD conversion, the NTSC/PAL conversion, and the PAL/NTSC conversion.

26. The nonlinear editing device according to claim 13 further comprising

a third format converter for converting output data of said digital video effector with at least one of the SD/HD conversion, the HD/SD conversion, the NTSC/PAL conversion, and the PAL/NTSC conversion.

27. The nonlinear editing device according to claim 17 further comprising

a third format converter for converting output data of said digital video effector with at least one of the SD/HD conversion, the HD/SD conversion, the

NTSC/PAL conversion, and the PAL/NTSC conversion.

- 28. The nonlinear editing device according to claim 18 further comprising
- a third format converter for converting output data of said digital video 5 effector with at least one of the SD/HD conversion, the HD/SD conversion, the NTSC/PAL conversion, and the PAL/NTSC conversion.
  - 29. The nonlinear editing device according to claim 21 further comprising
- a third format converter for converting output data of said digital video 10 effector with at least one of the SD/HD conversion, the HD/SD conversion, the NTSC/PAL conversion, and the PAL/NTSC conversion.
  - 30. The nonlinear editing device according to claim 22 further comprising
  - a third format converter for converting output data of said digital video effector with at least one of the SD/HD conversion, the HD/SD conversion, the NTSC/PAL conversion, and the PAL/NTSC conversion.
    - 31. A nonlinear editing method for editing video data, audio data, or video data and audio data, said nonlinear editing method comprising
- a first decoding step for sequentially decompressing video data which is 20 recorded in a storage that can record the video data compressed and encoded in a plurality of kinds of compression formats keeping the compression formats and has at least two or more compression formats of the plurality of kinds of compression formats.
- 32. The nonlinear editing method according to claim 31 further comprising
  - a second decoding step for sequentially decompressing video data recorded in the storage in at least one or more compression formats of the

10

15

20

25

plurality of kinds of compression formats.

- 33. The nonlinear editing method according to claim 32, wherein said first decoding step and said second decoding step are sequentially switched with each other responsive to a transition point of compression formats when compression formats of the video data read out from the storage are various.
- 34. The nonlinear editing method according to claim 32, wherein video data in a part at least one of just before a transition point of compression formats and just after of the point are decompressed in said second decoding step, and video data in the other part is decompressed in said first decoding step, when compression formats of the video data read out from said storage are various.
- 35. The nonlinear editing method according to claims 32, 33, or 34 further comprising

a video effect step for synthesizing output data obtained in said first decoding step and output data obtained in said second decoding step.

36. The nonlinear editing method according to claim 31 further comprising

a first format converting step for converting output data of said first decoding step with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.

37. The nonlinear editing method according to claims 32, 33, or 34 further comprising

a first format converting step for converting output data obtained in said first decoding step with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.

38. The nonlinear editing method according to claim 35 further comprising

a first format converting step for converting output data obtained in said first decoding step with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.

39. The nonlinear editing method according to claims 32, 33, or 345 further comprising

a second format converting step for converting output data obtained in said second decoding step with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.

40. The nonlinear editing method according to claim 35 further comprising

a second format converting step for converting the output data obtained in said second decoding step with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.

41. The nonlinear editing method according to claim 37 further comprising

a second format converting step for converting the output data obtained in said second decoding step with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.

42. The nonlinear editing method according to claim 38 further 20 comprising

a second format converting step for converting the output data obtained in said second decoding step with at least one of SD/HD conversion, HD/SD conversion, NTSC/PAL conversion, and PAL/NTSC conversion.

43. The nonlinear editing method according to claim 35 further comprising

a third format converting step for converting output data obtained in said video effect step with at least one of SD/HD conversion, HD/SD conversion,

10

NTSC/PAL conversion, and PAL/NTSC conversion.

- 44. The nonlinear editing method according to claim 38 further comprising
- a third format converting step for converting output data obtained in said video effect step with at least one of the SD/HD conversion, the HD/SD conversion, the NTSC/PAL conversion, and the PAL/NTSC conversion.
- 45. The nonlinear editing method according to claims 40 or 42 further comprising
- a third format converting step for converting output data obtained in said video effect step with at least one of the SD/HD conversion, the HD/SD conversion, the NTSC/PAL conversion, and the PAL/NTSC conversion.

10

## ABSTRACT

Hard disk unit (101) stores a plurality of encoded video data that is encoded in a plurality of compression formats, and the encoded video data is arbitrarily read out. The encoded video data read from hard disk unit (101) is decoded by first multi-format decoder (102) or second multi-format decoder (104) in response to a command of editing control section (109), and is supplied to first format converter (103) or second format converter (105). The data that is converted in relation to video format by each format converter is synthesized by DVE (106), is converted in relation to video format by third format converter (107), and is outputted from video output section (108).

Literal translation

1/7

Fig. 1



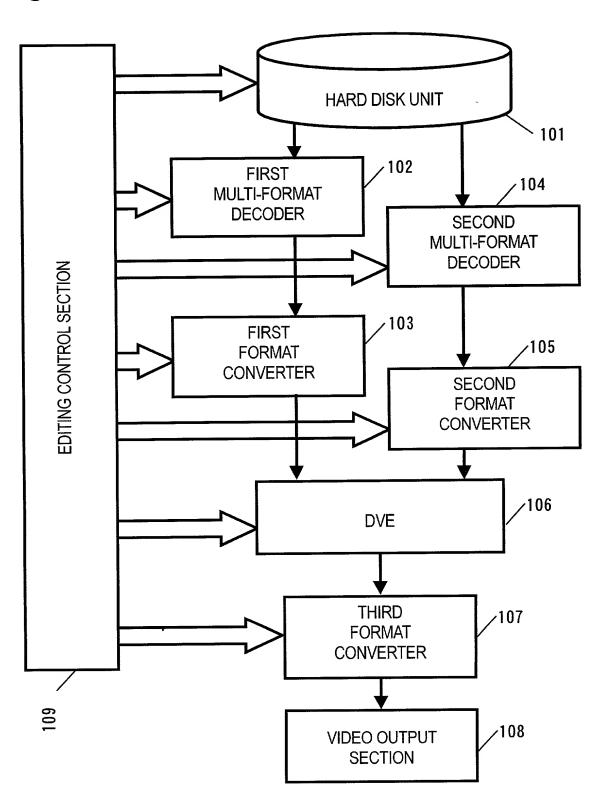


Fig. 2

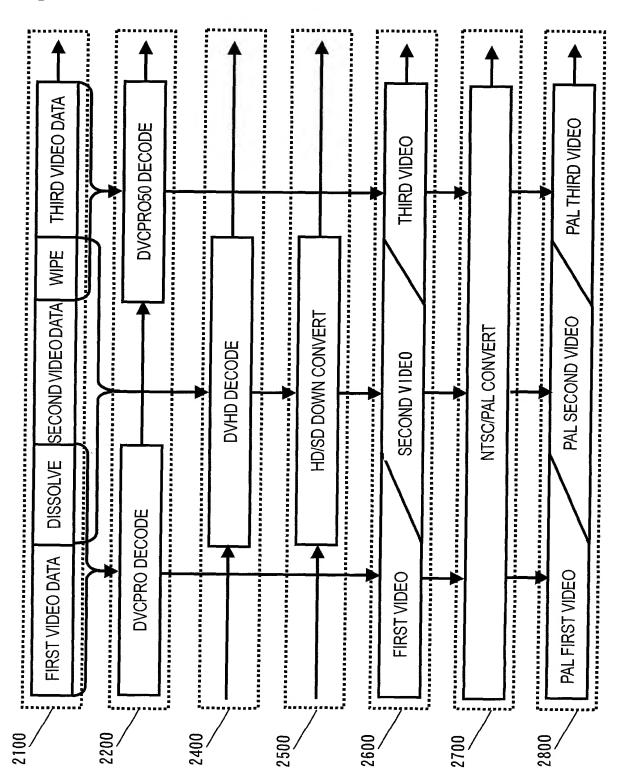

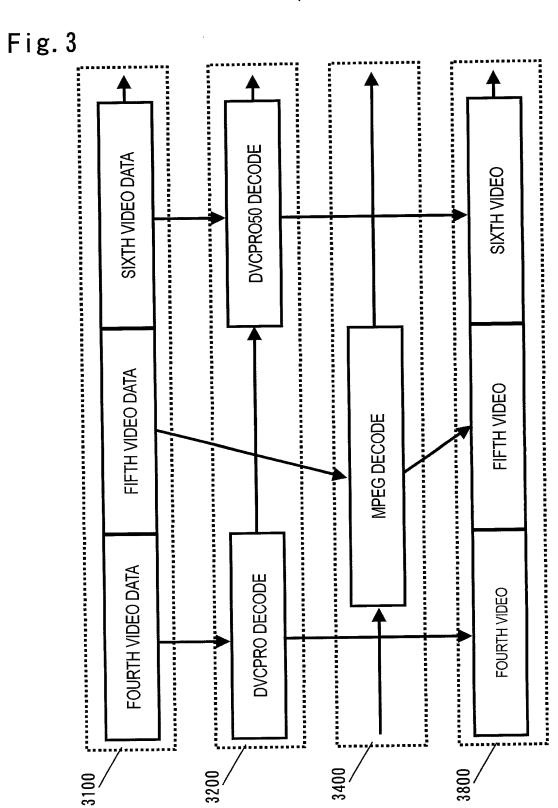

Land Can the train to the train to the train that the train the tr

Fig. 4


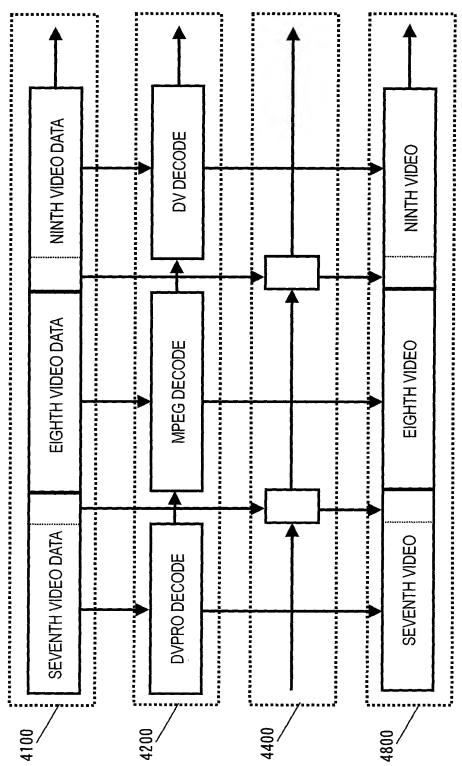



Fig. 5

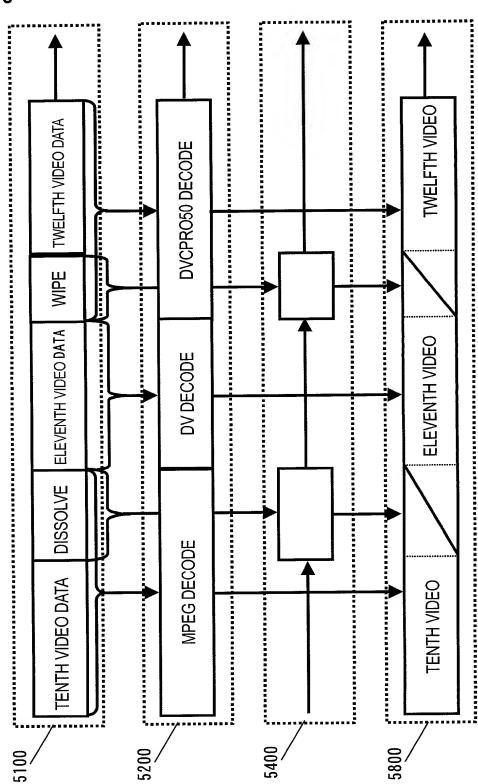

Literal translation

6/7

Fig. 6

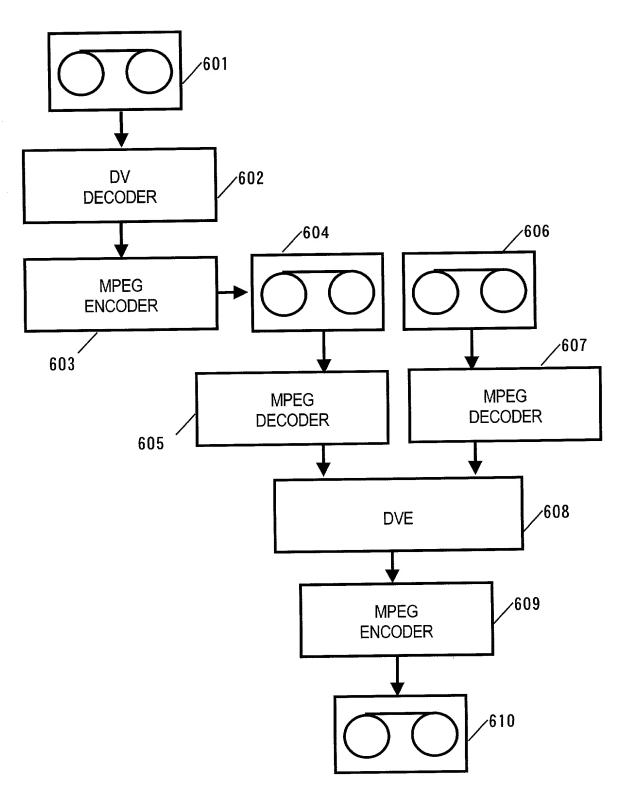


## Literal translation

7/7

# Reference numerals

101 ····· HARD DISK UNIT
102 ····· FIRST MULTI-FORMAT DECODER
103 ····· FIRST FORMAT CONVERTER
104 ····· SECOND MULTI-FORMAT DECODER
105 ····· SECOND FORMAT CONVERTER
106 ····· DIGITAL VIDEO EFFECTOR
107 ····· THIRD FORMAT CONVERTER
108 ····· VIDEO OUTPUT SECTION
109 ····· EDITING CONTROL SECTION

R:252



# Declaration and Power of Attorney For Patent Application English Language Declaration

	<del></del>		
As a below named inv	ventor, I hereby declare	that:	
My residence, post of	fice address and citizen	ship are as stated below next to my nar	ne,
first and joint inventor and for which a paten NONLINEAR EDITING is checked:	(if plural names are list t is sought on the Inven G METHOD, the specifi	ntor (if only one name is listed below) or ed below) of the subject matter which is tion entitled NONLINEAR EDITING DE cation of which is attached hereto unles	claimed VICE AND
United States Ap	oruary 21, 2000 ás plication Number or PC October 25, 2000 ed on (if applicable).	T International Application Number PC	T/JP00/00963
I hereby state that I h	ave reviewed and under	rstand the contents of the above identifications are identifications.	ed apecification,
acknowledge the du	ty to disclose informatio	n which is material to patentability as de	efined in 37 CFR §
application(s) for pate designated at least of below by checking	ent or inventor's certifications country other than the box, any foreign on having a filing date button(s)	der 35 U.S.C. §119(a)-(d) or § 365 ate, or § 365(a) of any PCT International the United States, listed below and happlication for patent or inventor's defore that of the application on which proceed that of the application on which proceeds that of the application on which proceeds are the application of the application o	al application which have also identified certificate, or PCT
	Japan /		
(Number)	(Country)	(Day/Month/Year Filed)	Ll.
(Number)	(Country)	(Day/Month/Year Filed)	
I hereby claim the books the books of the below.	enefit under 35 U.S.C.	§ 119(e) of any United States provis	ional application(s)
(Application Number)	(Filing Date)		
(Application Number)	(Filing Date)		
PCT International app matter of each of the international applicat acknowledge the duty	plication designating the claims of this application in the manner prototolars of the disclose information	120 of any United States application(se United States, listed below and, instation is not disclosed in the prior United by the first paragraph of 35 which is material to patentability as deling date of the prior application and the	ofar as the subject ted States or PCT U.S.C. § 112, I ofined in 37 CFR §

(Application Number	'n	(Filing Date)	(Status - pate	nted, pending, abandone	ed)
(Application Number	n	(Filing Date)	(Status - pate	nted, pending, abandone	ed)
	secute this app	a named inventor, lication and transac			
Paul F. Presta Allan Ratner Andrew L. Nay Konneth N. Nigon Kevin R. Casey Benjamin E. Leace James C. Simmons	Reg. No. 23,031 Reg. No. 19,717 Reg. No. 20,300 Reg. No. 31,549 Reg. No. 32,117 Reg. No. 33,412 Reg. No. 24,842	Louis W Beardell, Jr.	Reg. No. 34,515 Reg. No. 35,201 Reg. No. 25,771 Reg. No. 38,040 Reg. No. 27,424 Reg. No. 40,506 Reg. No. 41,738	Mark J. Marcelli Jack J. Jankovitz Jonathan H. Spadt Christopher I. Halliday Soott A. Moksown	Reg. No. 35,593 Reg. No. 42,690 Reg. No. 45,122 Reg. No. 42,621 Reg. No. 12,866
Ratner & Prest	tia, Suite 301, O	Lawrence E. Ashery ne Westlakes, Berwy awrence E. Ashery			9482-0980
statements mad were made with by fine or impri	le on information the knowledge sonment, or bo	tatements made he had belief are be that willful false th, under Section 1 by jeopardize the val	lieved to be true statements and 001 of Title 18 o	e; and further that the definition of the like so made of the United States	hese statements e are punishable s Code and that
Full name of sole or		name, family name) <u>Kun</u>	itaka Somiya		
Inventor's signature		taka Somiya		Date December	er 6, 2000
Residence Osaka,		V			
Citizenship Japane			70.0004		
Post Office Address	3-3-303, Myokenz	aka, Katano-shi, Osaka 5	(6-0021, Japan		